



10 MHz LOW Phasenoise OCXO

DESCRIPTION:

O.30.806314-LF is a high performance Oven Controlled Crystal Oscillator **OCXO** offering exceptional combination of ULTRA Low Phase Noise (**ULPN**) (close-in) Low G-Sensitivity (**LGS**) and tight frequency stability.

The RoHS-compliant part (**LF**) comes in a small sized hermetically sealed metal can package what makes it suitable for humid climate environment.




FEATURES:

- Ultra low Phase Noise:
 - 120 dBc / Hz @ 10 Hz
 - 148 dBc / Hz @ 100 Hz
- Low G-Sensitivity
 - ≤ 1 ppb/g
- Frequency Tuning Input

APPLICATIONS:

- Instrument Reference
- Microwave Communication
- Clock Reference for Microwave Signal Source
- Synthesizer Reference Clock
- Test & Measurement
- Telecom Systems

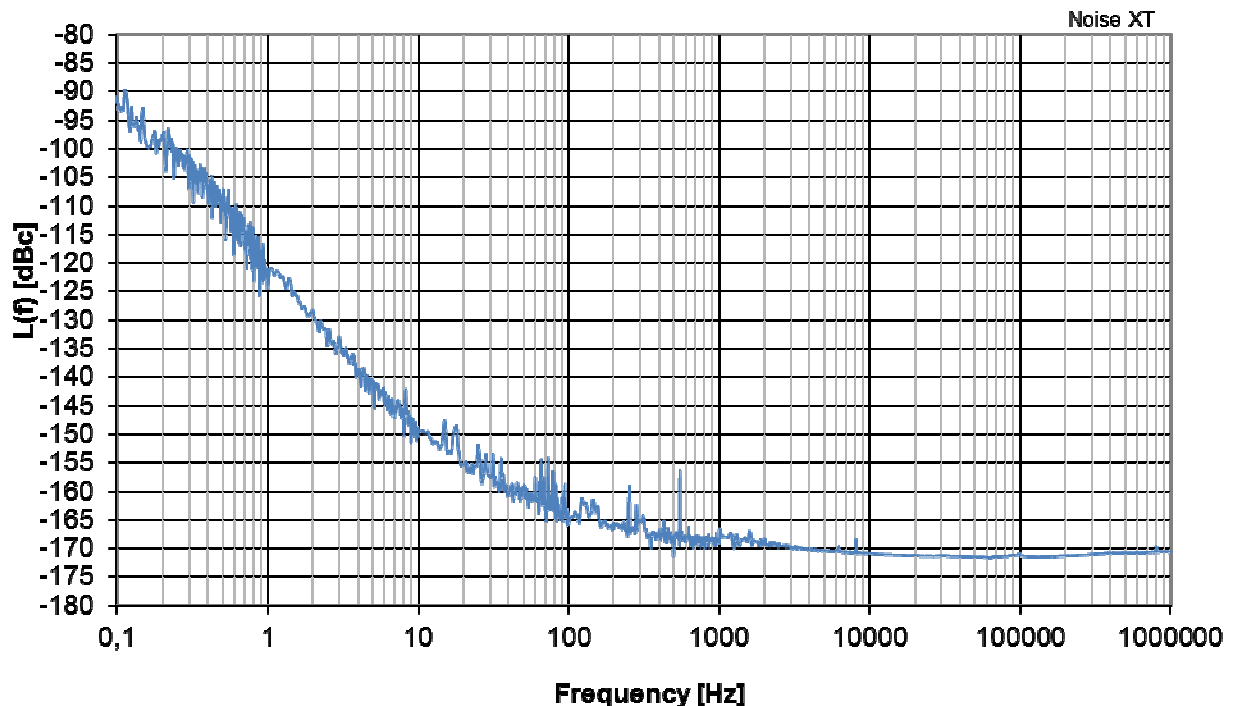

KVG Quartz Crystal Technology GmbH

Waibstadter Strasse 2 – 4, 74924 Neckarbischofsheim, Germany

Tel.: +49 (0) 7263/648-0; Fax: +49 (0) 7263/6196

email: info@kvg-gmbh.de

web: www.kvg-gmbh.de



ROHS-Compliant Product

O.30.806314-LF



1. Specification	
Test conditions: $V_S = +12\text{ V}$, $V_C = +5.0\text{ V}$; $T_A = +25\text{ °C}$ except when stated otherwise	
Nominal Frequency F_N :	10.000 MHz
Frequency stability vs. temperature range 0°C to +60 °C:	$\pm 10\text{ ppb}$
Frequency stability vs. supply voltage changes $V_S \pm 5\%$: vs. load changes 50 Ohm $\pm 5\%$:	$\leq \pm 1.0\text{ ppb}$ $\leq \pm 1.0\text{ ppb}$
Aging (after 30 days of continuous operation): per day: 1st year: 20 years:	$\leq \pm 0.5\text{ ppb}$ $\leq \pm 50\text{ ppb}$ $\leq \pm 400\text{ ppb}$
Frequency control range (referred to F_N) :	$\geq \pm 0.4\text{ ppm}$
Frequency control voltage range V_C : Control Voltage Input Impedance:	+0.0 V ... +10.0 V $\geq 10\text{ kOhm}$
Tuning slope dF/dV_C / Linearity:	Positive / 10%
Tuning coverage:	$\geq 20\text{ years}$
Supply voltage V_S :	+12.0 V $\pm 5\%$
Supply current I_S : steady state @ $T_A = +25\text{ °C}$: during warm-up:	$\leq 150\text{ mA}$ $\leq 400\text{ mA}$
Warm up time @ $T_A = +25\text{ °C}$ to $dF/F < \pm 1 \times 10^{-7}$ referred to final frequency after 1 hour:	$\leq 5\text{ min}$
Output voltage : level: load :	sine wave $\geq +10\text{ dBm}$ 50 Ohm
Harmonics: Spurious (10 Hz to 1 MHz from carrier):	$\leq -30\text{ dBc}$ $\leq -80\text{ dBc}$
Short term stability (Allan Deviation) @ $\tau = 1\text{ sec}$:	$\leq 1 \times 10^{-12}$ (typical)
G-Sensitivity (each axis):	$\leq 1\text{ ppb/g}$ (typical)

4				KVG Quartz Crystal Technology GmbH P.O. Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
3				
2				
1		19.05.2017	Balzer	
ED	Description	Date	Name	



ROHS-Compliant Product

O.30.806314-LF



Phase noise max. values at offset frequency:	1 Hz: -120 dBc/Hz 10 Hz: -148 dBc/Hz 100 Hz: -162 dBc/Hz 1 kHz: -165 dBc/Hz 10 kHz: -168 dBc/Hz 100 kHz: -168 dBc/Hz 1 MHz: -168 dBc/Hz
Temperature ranges Storage:	-40 °C ... +85 °C

2. Environmental conditions

According to KVG Product Qualification Procedure AA-QM-202

3. Marking

Manufacturer's name, date code (week/year); Specification; Nominal frequency

5. Case

Case style: BF9-IS-19.4

Pin configuration

- Control voltage V_C
- N.C.
- Supply voltage V_S
- RF output
- Ground, case

Moisture Sensitivity Level: 1

Termination finish:
Sn95.5 Ag3.8 Cu

Solderability:
DIN IEC 68-2-20 (TA)

RoHS-6 compliant

max. height incl. stand-offs: 20.5mm

4				KVG Quartz Crystal Technology GmbH P.O. Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
3				
2				
1		19.05.2017	Balzer	
ED	Description	Date	Name	