




3-Phase to Single-Phase AC Conversion

with **Balanced 3-Phase Currents**

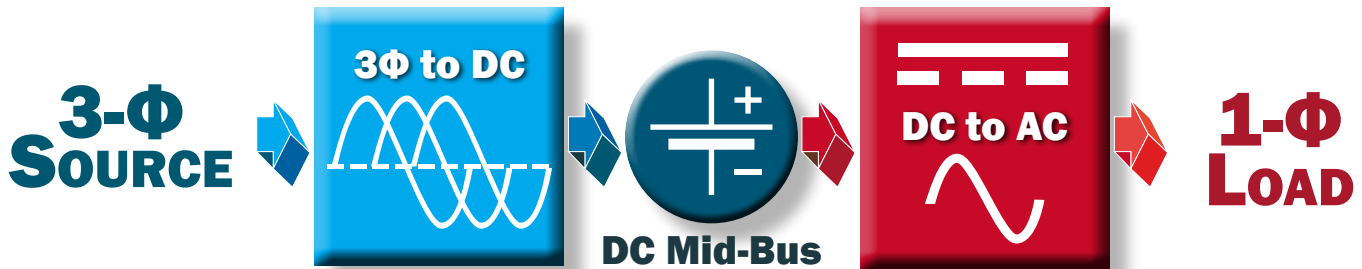

Phase Current Balancing Solutions for 440 V, 230 V and 115 V 3-Phase Systems



Military-Grade 3-Phase AC Changer
MAC-4000

Military-Grade Power Supply
MPS-4000

Military-Grade Inverter
MINV-4000



Designed and manufactured in the USA • www.synqor.com

For SynQor product information and sales

Contact our team on 0330 313 3220

enquiries@apcplc.com



3-Phase to Single-Phase AC Conversion

with **Balanced 3-Phase Currents**

3-PHASE CURRENT BALANCING PROBLEM


Single-Phase loads represent a complex problem for 3-Phase utilities found in aircraft and ships in that phase currents must be closely balanced. In fact, MIL-STD-1399-300B requires all phase currents to be balanced to within $\pm 5\%$ for ships and $\pm 3\%$ for submarines. It is impossible to achieve this degree of phase-to-phase current balance in a 3-Phase system that has significant Single-Phase electronic loads. The industrial, shipping and military sectors have therefore used UPS, electronic voltage regulators, variable shunt reactors and sophisticated transformer arrangements to try to balance 3-Phase loads. These solutions are heavy, bulky and usually do not solve the phase current balance problem.

SYNQOR'S SOLUTION

SynQor has developed an electronic solution to solve the 3-Phase current balance problem. The conceptual approach is to isolate the input 3-Phase power source from the output Single-Phase loads through a DC Mid-Bus. An AC to DC converter converts 3-Phase power into DC at the Mid-Bus. An inverter then converts the DC power into Single-Phase. This approach allows unbalanced noisy Single-Phase loads to appear to the input 3-Phase source as, clean, well behaved, high power factor, balanced and MIL-STD-1399-300B compliant 3-Phase loads. SynQor has compact, lightweight, efficient and military rugged current balancing solutions for 440 V, 230 V and 115 V 3-Phase systems.


440 V_{AC}

For the 440 voltage input solution, SynQor has developed the Military-Grade 3-Phase AC Changer (MAC).

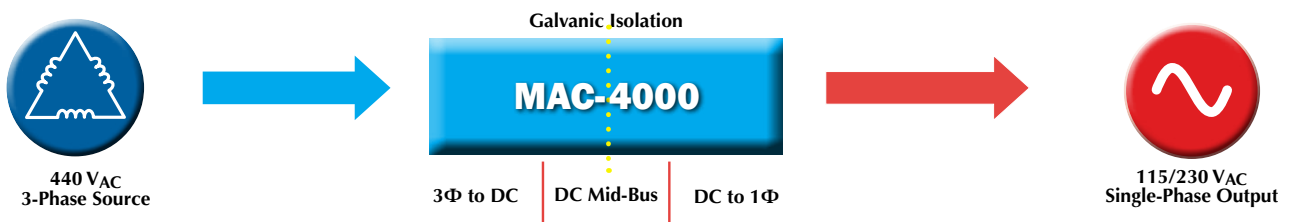

115 OR 230 V_{AC}

For 115 and 230 input voltages, the SynQor solution uses its field proven 115 V or 230 V universal frequency input Military Power Supply (MPS) followed by its 115 or 230 output voltage Military Inverter (MINV).

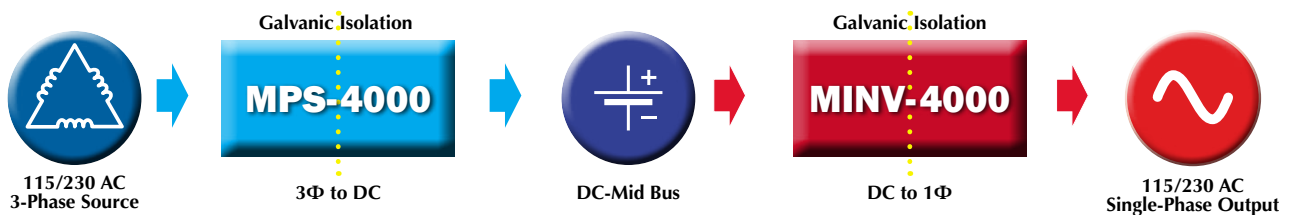

BENEFITS OF SYNQOR'S APPROACH:

- ◆ Balanced load currents for 3-Phase sources; MIL-STD-1399-300B compliant.
- ◆ Components are compact, ultra-low weight, efficient and rugged to military standards.
- ◆ Galvanic Isolation between the input source and the output load.
- ◆ High noise and transient isolation between the input source and the output load.
- ◆ Floating or non-floating ground outputs options: 115 or 230 volts at 50, 60 or 400 Hz.
- ◆ Parallel/redundant configurations of up to 32 systems than can condition loads of up to 110 kW.
- ◆ Complex 3-Phase and Split-Phase parallel or redundant output configurations.
- ◆ Full power operation: -40°C to $+55^{\circ}\text{C}$
- ◆ All devices can be remotely monitored via SNMP.

For SynQor product information and sales

Contact our team on 0330 313 3220
enquiries@apcplc.com



MPS

Military Power Supply



MINV

Military Power Inverter



Up to 32 units can be combined for higher power or redundancy

MILITARY-GRADE 115 V, 230 V 3-PHASE CURRENT BALANCING SOLUTION

The MPS is a nearly perfectly 3-Phase balanced load that converts 3-Phase AC to DC in the Mid-Bus. The MINV transforms DC power in the Mid-Bus to a well-conditioned AC Single-Phase output. This system architecture can be paralleled to permit fault-tolerant parallel operation for higher power and/or N+M redundant systems.

MPS + MINV PRODUCT FEATURES

- ◆ Sealed, weather-proof, shock-proof construction
- ◆ Two-stage, DC link isolated topology
- ◆ 4000 W (5000 VA) output power
- ◆ Phase input: 80-265 Vrms line-to-line; 47-800 Hz
- ◆ Input Current Balance <math>< \pm 3\%</math>
- ◆ Handles 0.0—1.0 power factor loads and non-linear loads
- ◆ Full power operation: -40 °C to +55 °C
- ◆ Up to 32 units can be combined for higher power, voltage or a 3-Phase AC output
- ◆ Up to 32 units can be combined to form a higher power fault-tolerant, glitch-free system, N+M redundant systems
- ◆ Battle Mode for over-temperature events
- ◆ User I/O and Configuration signal port
- ◆ SNMP Monitoring
- ◆ MPS 1U high rack mount unit (17.00"W x 20.42"D x 1.73"H)
- ◆ MINV 1U high rack mount unit (17.00"W x 22.43"D x 1.73"H)
- ◆ Low weight: MPS - 28 lbs., MINV - 32 lbs.

SPECIFICATION COMPLIANCE

MPS & MINV system integration is designed to meet:

- ◆ MIL-STD-1399-300B - Interface Shipboard
- ◆ MIL-STD-810G - Environmental Engineering
- ◆ MIL-STD-461F - Electromagnetic Interference
- ◆ MIL-STD-704F - Aircraft Electrical Power
- ◆ MIL-STD-1275D - Vehicle Electrical Power

OUTPUT OPTIONS

- ◆ Pure sinusoidal 115 Vrms or 230 Vrms AC output
- ◆ 50 Hz, 60 Hz, or 400 Hz AC output
- ◆ Shipboard version with floating neutral wire
- ◆ N+1 redundancy



For SynQor product information and sales


Contact our team on 0330 313 3220
enquiries@apcplc.com



TECHNOLOGY GROUP PLC

MPS

FROM AC
3-PHASE
SOURCE

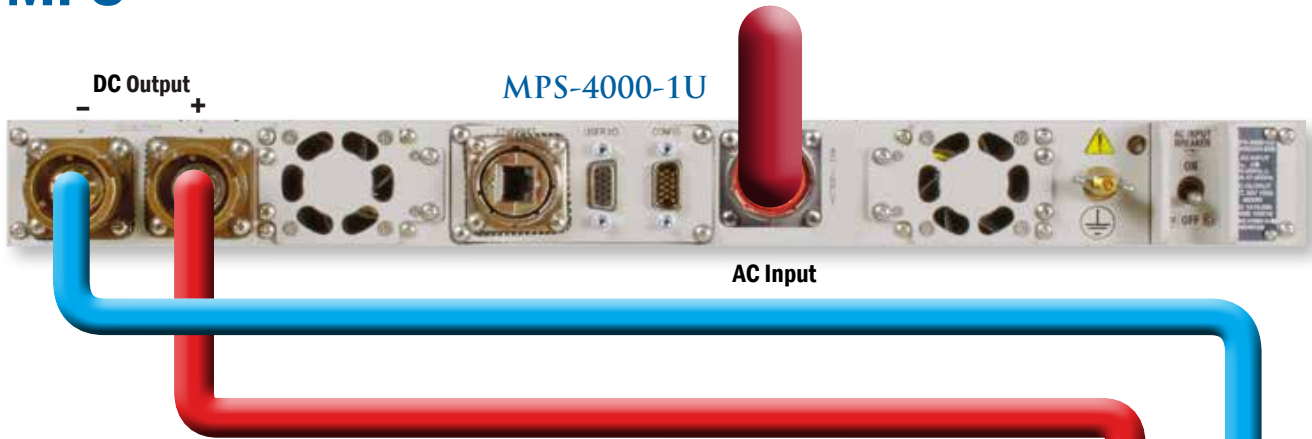

MINV



3-PHASE MILITARY-GRADE AC-DC POWER SUPPLY (MPS)

Family	Output Power	Height	AC Input Phase #	AC Input Frequency	DC Output Voltage @ Full Load*	Output Regulation	Network
MPS	4000: 4000 W	1U: 1.73"	3: 3-Phase	W: 47-800 Hz	2D: 28 V 2E: 30 V 4B: 48 V	S00: Semi-regulated	E00: Ethernet/SNMP

Part Numbering Example: MPS-4000-1U-3W2ES00-E00 For valid part numbers, refer to the website or contact your local sales representative.

*Approximate output voltage at full load, output voltage has Droop

MILITARY-GRADE POWER INVERTER (MINV)

Family	Output Power	Height	DC Input Voltage	AC Output Voltage	AC Output Neutral Wire	AC Output Set Point Frequency	Output Configuration	Additional Options
MINV	4000: 4000 W 5000 VA	1U: 1.73"	28: 28 V _{NOM}	1: 115 Vrms 2: 230 Vrms	G: Grounded F: Floating* R: AC Output Electronic Breaker*	5: 50 Hz 6: 60 Hz 4: 400 Hz	S: Single-Phase Output	E00: Ethernet / SNMP ECE: Ethernet / SNMP & CE Marking

***Note:** Order "F: Floating" option when configuring the AC output for multi-unit combinations of up to 32 units.
Order "R: AC Output Electronic Breaker" option for fault-tolerant, glitch-free parallel systems of up to 32 units with N+M redundancy.
The AC output neutral wire will not be connected to the chassis for either the F option or R option.

Part Numbering Example: MINV-4000-1U-28-1G6S-E00 For valid part numbers, refer to the website or contact your local sales representative.

For SynQor product information and sales

Contact our team on 0330 313 3220

enquiries@apcplc.com



MAC

Military AC Changer



Up to 32 units can be combined for higher power or redundancy

MILITARY-GRADE 440 V 3-PHASE AC CHANGER (MAC)

This MAC will accept a 3-Phase 440 V_{AC} input and change it to a well-conditioned Single-Phase 115/230 V_{AC} output using a two-stage DC link isolated topology. Options include a selection of output voltage amplitudes, frequencies and an electronic breaker on the AC output to permit fault-tolerant parallel operation for higher power and/or N+M redundant systems

MAC PRODUCT FEATURES

- ◆ Sealed, weather-proof, shock-proof construction
- ◆ Two-stage, DC link isolated topology
- ◆ 4000 W (5000 VA) output power
- ◆ Full power operation: -40 °C to +55 °C
- ◆ 3-Phase 360-528 V_{rms}_{L-L} 3-wire input
- ◆ 47-65 Hz input range
- ◆ Pure sinusoidal AC output voltage
- ◆ Handles 0.0—1.0 power factor loads and non-linear loads
- ◆ Up to 32 units can be combined for higher power, voltage or a 3-Phase AC output
- ◆ Up to 32 units can be combined to form a higher power fault-tolerant, glitch-free system, perhaps with N+M redundancy, by ordering with the “AC Output Electronic Breaker” option and the appropriate configuration cable
- ◆ User I/O and Configuration signal ports
- ◆ Battle Mode for over-temperature events
- ◆ 1U high rack mount unit (17.00”W x 22.42”D x 1.73”H)
- ◆ Low weight: 33 lbs.

SPECIFICATION COMPLIANCE


MAC-4000 units are designed to meet MIL-STD:

- ◆ MIL-STD-1399-300B - Interface Shipboard
- ◆ MIL-STD-810G - Environmental Engineering
- ◆ MIL-STD-461F - Electromagnetic Interference

OPTIONS

- ◆ 115 V_{rms} or 230 V_{rms} AC output
- ◆ 50 Hz, 60 Hz, or 400 Hz AC output
- ◆ Shipboard version with floating output neutral wire
- ◆ N+1 Redundancy

MAC-4000-1U

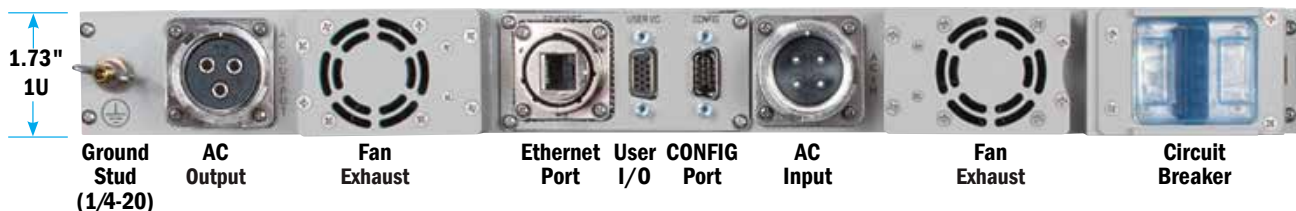

MILITARY-GRADE AC CHANGER (MAC)

Family	Output Power	Height	Line to Line Input Voltage	Number of Input Phases	Input Frequency Range	AC Output Voltage	AC Output Neutral Wire	AC Output Set Point Frequency	Output Configuration	Additional Options
MAC	4000: 4000 W 5000 VA	1U: 1.73”	4: 360-528 V	T: 3-Phase	L: 47-65 Hz	1: 115 V 2: 230 V	G: Grounded F: Floating* R: AC Output Electronic Breaker*	5: 50 Hz 6: 60 Hz 4: 400 Hz	S: One Single-Phase Output	E00: Ethernet / SNMP ECE: Ethernet / SNMP & CE Marking

Not all combinations make valid part numbers, please contact SynQor for availability. See the Product Summary web page for more options.

*Note: Order “F: Floating” option when configuring the AC output for multi-unit combinations of up to 32 Units.

Order “R: AC Output Electronic Breaker” option for fault-tolerant, glitch-free parallel systems of up to 32 units with N+M redundancy.

The AC output neutral wire will not be connected to the chassis for either the F option or R option.

Part Numbering Example: MAC-4000-1U-4TL2G6S-E00 For valid part numbers, refer to the website or contact your local sales representative.


For SynQor product information and sales

Contact our team on 0330 313 3220

enquiries@apcplc.com



MILITARY-GRADE POWER SYSTEMS 1U MECHANICALS

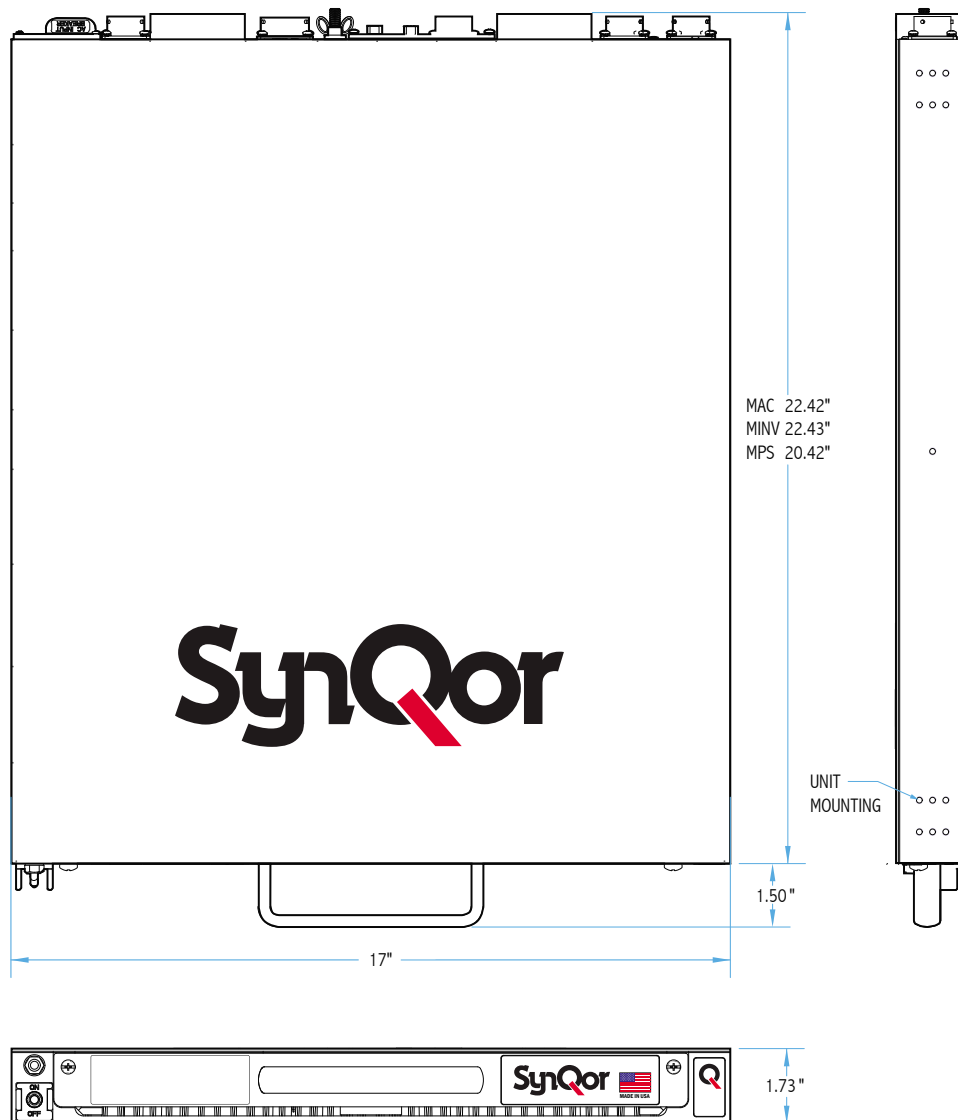

About APC Technology Group

Established in 1982, APC Technology Group provides the design, specification and distribution of specialist electronic components and systems, lighting technologies and connectivity products. Our technologies enable our customers to produce better equipment, meet design specifications, improve efficiency and achieve superior performance.

For more information please call +44 (0) 330 313 3220 or visit www.apcplc.com

For SynQor product information and sales

Contact our team on 0330 313 3220
enquiries@apcplc.com

